

Acrylic2Go

LED Illuminated Panels



RS-1 Frame Style

Snap frame width = 1-3/8" x 1-1/8" depth.
Add 2" from Picture Size to outside dimensions.
Viewable is minus 5/8" from Picture Size.




Standard LED Panel Specifications

Model	Picture size	Frame Size	Viewable	Weight	Power Draw	
					Watts	Amps
Large Format Sizes						
LF34	36" x 48" (1219 x 914mm)	1271 x 966 x 29mm	1203 x 898mm	21 kg	25W	3A
LF35	36" x 60" (1524 x 914mm)	1576 x 966 x 29mm	1508 x 898mm	28 kg	31W	3A
LF36	36" x 72" (1829 x 914mm)	1881 x 966 x 29mm	1813 x 898mm	32 kg	36W	5A
LF38	36" x 96" (2438 x 914mm)	2490 x 966 x 29mm	2422 x 898mm	40 kg	49W	5A
LF46	48" x 72" (1829 x 1219mm)	1881 x 1271 x 29mm	1813 x 1203mm	45 kg	60W	8.5A
LF48	48" x 96" (2438 x 1219mm)	2490 x 1271 x 29mm	2422 x 1203mm	54 kg	74W	8.5A

NOTE: The RS-1 frame is available by special order on the following sizes C2430, C2436, C2448 C2460 C2472 C3040

RS-2 Frame Style

Snap Frame width = 1" x 1/2" depth.
Add 1" from Picture Size for outside dimensions.
Viewable is minus 1" from Picture Size.

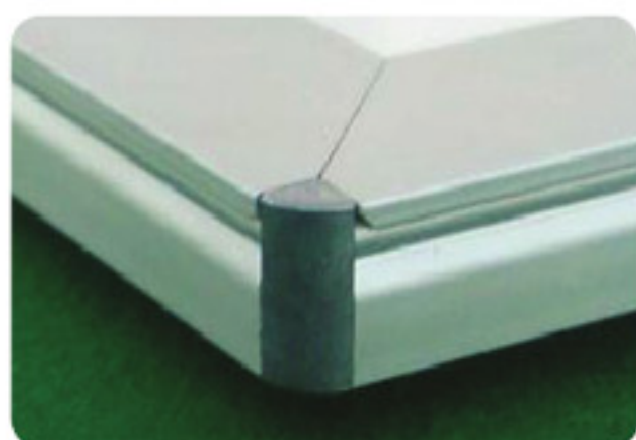

Model	Picture size	Frame Size	Viewable	Weight	Power Draw	
					Watts	Amps
Standard Sizes						
A4	8.5" x 11.5" (292 x 216mm)	325 x 249 x 14mm	277 x 201mm	1.5 kg	3W	1.5A
A3	11.5" x 16.5" (419 x 292mm)	452 x 325 x 14mm	404 x 277mm	3 kg	5W	1.5A
A2	16.5" x 23.5" (597 x 419mm)	630 x 452 x 14mm	582 x 404mm	4.5 kg	8W	1.5A
C1824	18" x 24" (610 x 457mm)	643 x 490 x 14mm	595 x 442mm	5 kg	8W	1.5A
C2228	22" x 28" (711 x 559mm)	744 x 592 x 14mm	696 x 544mm	5 kg	14W	1.5A
C2430	24" x 30" (762 x 610mm)	795 x 643 x 14mm	747 x 595mm	5.5 kg	17W	1.5A
C2436	24" x 36" (914 x 610mm)	947 x 643 x 14mm	899 x 595mm	8.5 kg	18W	1.5A
C2448	24" x 48" (1220 x 610mm)	1253 x 643 x 14mm	1205 x 595mm	13 kg	25W	3A
C2460	24" x 60" (1524 x 610mm)	1557 x 643 x 14mm	1509 x 595mm	16 kg	31W	3A
C2472	24" x 72" (1829 x 610mm)	1862 x 643 x 14mm	1814 x 595mm	20 kg	36W	5A
C3040	30" x 40" (1012 x 762mm)	1045 x 795 x 14mm	997 x 747mm	13 kg	20W	2A



Internally Mounted Springs

Heavy duty, internal springs offer reinforced support even under strong vibrations.



Cable Position

Rear mounted power cable and wiring allows for easy hanging and less cord visibility.



LED Panel Wiring

LED wiring is attached to the frame, NOT the acrylic, preventing disruptions.



Heat Management

LEDs by nature generate ample heat. Dissipation of this heat, allows for optimal life of the LEDs.

RS-D Frame Style

Double Sided Frame

Frame thickness is 35mm vs. 14mm for the RS-2 and 35mm longer and wider than the RS-2.



Model	Picture size	Frame Size	Viewable	Weight	Power Draw	
					Watts	Amps
Standard Sizes						
D2228	22" x 28" (711 x 559mm)	779 x 627 x 35mm	701 x 548mm	8 kg	18W	1.5A
D2430	24" x 30" (762 x 610mm)	830 x 678 x 35mm	752 x 600mm	8.5 kg	19W	2A
D2436	24" x 36" (914 x 610mm)	982 x 678 x 35mm	900 x 600mm	13 kg	23W	2A
D2448	24" x 48" (1220 x 610mm)	1288 x 678 x 35mm	1210 x 600mm	19 kg	32W	3.8A
D2460	24" x 60" (1524 x 610mm)	1592 x 678 x 35mm	1514 x 600mm	26 kg	40W	3.8A
D2472	24" x 72" (1829 x 610mm)	1897 x 678 x 35mm	1819 x 600mm	32 kg	46W	3.8A
D3040	30" x 40" (1012 x 762mm)	1080 x 830 x 35mm	1002 x 752mm	18 kg	26W	2A
D34	36" x 48" (1219 x 914mm)	1287 x 982 x 35mm	1209 x 904mm	23 kg	32W	3.8A
D35	36" x 60" (1524 x 914mm)	1592 x 982 x 35mm	1514 x 904mm	31 kg	40W	3.8A